

VP55H-Z/VP55L-Z**55"/55"****500/700nits FHD Video Wall**

Key Feature

- ADSDS Technology
- FHD Resolution
- 700nits 500nits
- 7 × 24 Operation
- 25% Haze, 3H
- 50000H Operation Time
- Auto Gamma and HDR Calibration
- 0.88mm Slim Bezel
- RS232 Control
- Landscape & Portrait Installation Support
- VESA Mounting Interface

Specification

Model	VP55H-Z	VP55L-Z
Display		
Screen Size (Diagonal)	55 inch	
Native Resolution	1920 (H) × 1080 (V)	
Active Area	1209.6(H) × 680.4 (V)	
Physical Joint	0.88mm	
Aspect Ratio	16 : 9	
Brightness	700 cd/m ²	500 cd/m ²
Haze	25%, 3H	
Contrast	1200:1	
View Angle	178°(H) / 178°(V)	
Display Color	16.7M	
Response Time	8ms	
Operation Time	7 × 24H	
Life Time	50,000 Hrs. (Typ.)	

Interface

HDMI In	× 2 (HDMI 2.0)
DP In	× 2 (DP 1.2)
DP Out	× 1 (Daisy Chain, up to 4K input)
Audio Out	× 1 (3.5mm stereo jack)
RS232 In	× 1 (RJ45, Common used for IR in)
RS232 Out	× 1 (RJ45, Support IR OUT)
USB	× 1 (2.0, Firmware update only)

Power

Power Supply	AC 100~240V 50/60Hz
Power Consumption	240W(Typ)
Power Consumption(Stand by)	≤0.5W

Environment

Operation Temperature	0°C~50°C
Operation Humidity	10%~80% RH
Storage Temperature	-20°C~60°C
Storage Humidity	5%~90% RH


Specification

Model	VP55H-Z	VP55L-Z
Physical		
Color	Black	
Body Size (mm)	1210.8 (W) × 681.5 (H) × 96 (D) mm	
Package Size (mm) (2 sets inside)	1310 (W) × 330 (H) × 800 (D) mm	
Set Weight	27.9kg	
Package Weight (2 sets inside)	65kg	
VESA Mounting(mm)	400 × 400mm	


Dimension Drawing

Unit: mm

VP55H-Z

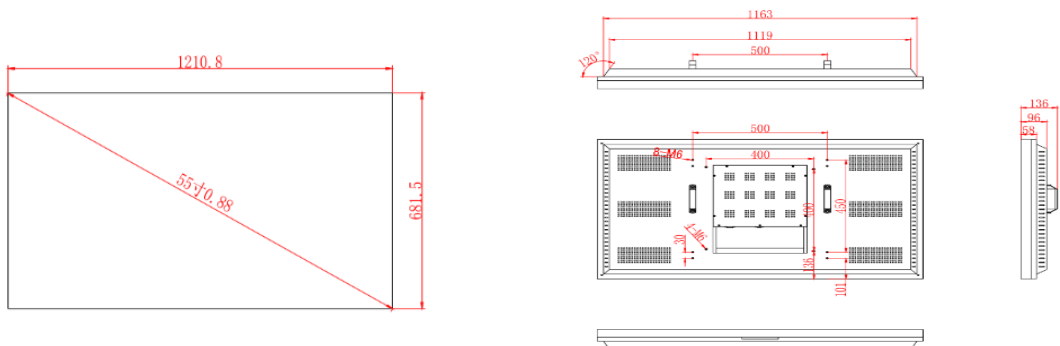


VP55L-Z

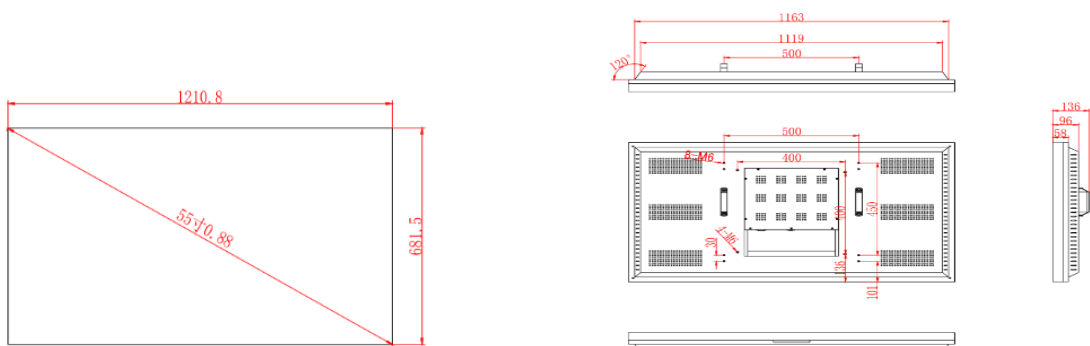

Specification

Auto Gamma and HDR Calibration

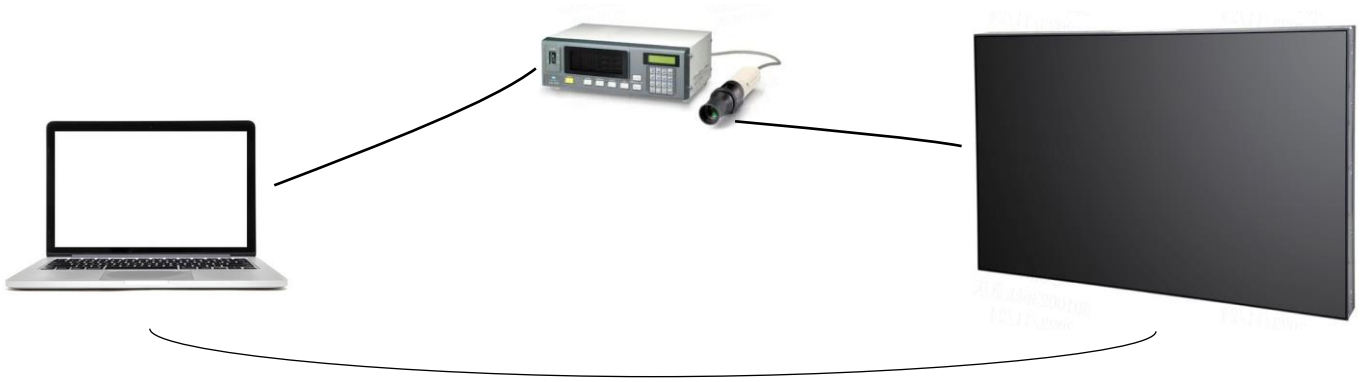

Accessories List

Items	Qty.	Specifications
Video Wall Set	2	-
Power Cable	2	1.5M, European Standard
LAN Cable	2	1.5M
Remote Controller	1	without Battery
RJ45 To RS232 adapter	1	DB9
IR Receiver	1	1M
Wall Mounting Hook	8	40*40mm
Screw for Hook Adjustment	24	M6*20
Screw for Hook Fixing	20	M6*10
Instruction Manual	1	A5